




FEDERNDEN DRUCKSTÜCK MIT BUND

SPRING LOADED THRUST PIECE WITH COLLAR

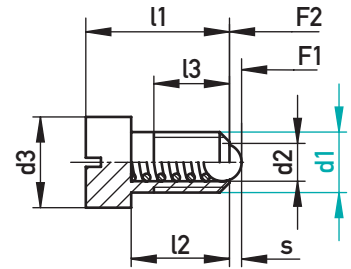

250 °C 1.0718


s	d2	F1 (N)	F2 (N)	l2	l3	l1	d3	d1	€/1
0,8	2,5	8	14	6,5	5,0	9,5	6	M4	•
0,9	3,0	8	14	8,5	6,7	12,5	8	M5	•
1,0	3,5	11	18	9,0	-	14,0	10	M6	•
1,5	4,5	18	31	11,0	-	16,5	13	M8	•
2,0	6,0	24	45	14,0	-	20,0	16	M10	•
2,5	8,0	26	49	15,0	-	22,0	18	M12	•

☒ 240136/d1



FEDERNDEN DRUCKSTÜCK ZUM EINPRESSEN – NICHTROSTEND

SPRING LOADED THRUST PIECE FOR PRESS FIT – STAINLESS STEEL



250 °C 1.4303; 1.4034

s	d2	F1 (N)	F2 (N)	l2	l1	d3	d1	€/1
0,7	2,38	1,8	3,5	0,6	4	3,5	3	•
1	3	2,5	6	0,9	5	4,6	4	•
1,4	4	3	6,5	0,9	6	5,6	5	•
1,8	5	5,5	11,5	1	7	6,5	6	•
2,4	6,5	7	12,5	1,1	9	8,5	8	•
3,3	8,5	8,5	18,5	1,5	13	11	10	•
4	10	12	26,5	2,3	16	13	12	•

☒ 240138/d1