



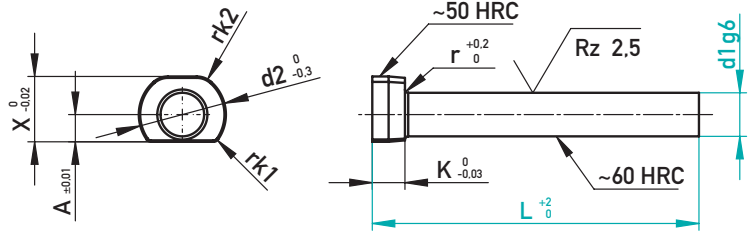

AUSWERFERSTIFT MIT VERDREHSICHERUNG UND VORZENTRIERUNG - GEHÄRTET - HSS
 EJECTOR PIN WITH ANTI-TWIST-LOCK AND PRE-CENTRING - HARDENED - HSS

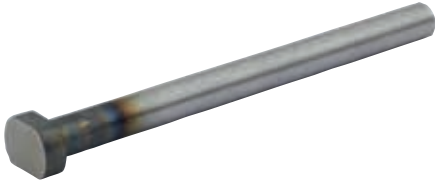

~1.3343

r	K	d2	A	X	Y	r2	rk1	rk2	d1	L				
										125	160	200	250	315
0,2	2	4	1,5	3,3	6	1,5	0,5	1	2	•	•	•	•	•
0,3	3	6	2	4,5	8,5	2	0,5	1	3	•	•	•	•	•
0,3	3	8	2,5	6	11	2,5	0,5	2	4	•		•	•	•
0,3	3	10	3,5	8	12,5	3	1,25	2,5	5	•		•		•
0,5	5	12	4	9	16	4	1,25	2,5	6	•		•		•

39555/d1-L

EINBAURAUM · MOUNTING SPACE

