




RINGSCHRAUBE, DREH- UND SCHWENKBAR – NICHTROSTEND

EYE BOLT, REVOLVABLE AND SWIVELLING – STAINLESS STEEL

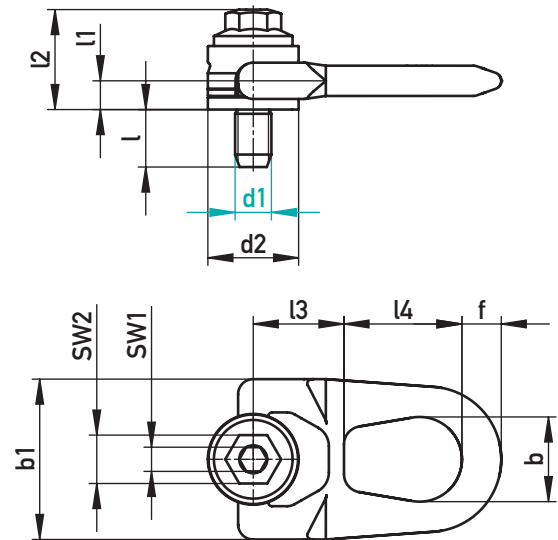

max. kg Sicherheitsfaktor 4:1 / max. kg safety factor 4:1

																	
max. kg*	max. kg*	max. kg*	l	l1	l2	l3	l4	b	b1	f	d2	SW1	SW2	Drehmoment Torque (Nm)	Gewicht Weight (kg)	d1	€/1
500	300	420	16	9,5	32	30	39	28	53	13	30	8	16	6	0,3	M8	●
900	500	700	16	9,5	32	30	39	28	53	13	30	8	16	10	0,3	M10	●
1000	800	1120	19	9,5	32	30	39	28	53	13	30	8	16	15	0,3	M12	●
1900	1500	2100	26	13	44	40	53	38	76	17	45	8	20	50	0,9	M16	●
1900	1600	2240	30	13	44	40	53	38	76	17	45	8	20	100	1,0	M20	●
3500	2700	3780	42	19	62	55	83	56	115	25	58	14	24	160	2,6	M24	●
3700	3500	4900	47	19	62	55	83	56	115	25	58	14	24	250	2,8	M30	●

* Weitere Informationen und aktuelle Nutzungshinweise entnehmen Sie bitte der Bedienungsanleitung.
You will find additional information and current terms of use inside the instruction manual.

✉ 40812/d1