




GEWINDESTIFT MIT INNENSECHSKANT

SET SCREW WITH HEXAGON SOCKET

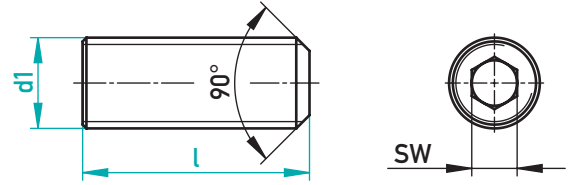

⊕ min. 1000 N/mm², ISO 4026 – 45H

SW	d1	l	€/1
1,5	M3	4	•
		6	•
		8	•
2	M4	10	•
		6	•
		8	•
		10	•
		14	•
2,5	M5	16	•
		25	•
		35	•
		8	•
		10	•
		12	•
3	M6	16	•
		25	•
		35	•
		8	•
		10	•
		12	•
		14	•
4	M8	16	•
		20	•
		30	•
		40	•
		50	•
		8	•


SW	d1	l	€/1
4	M8	25	•
		30	•
		40	•
5	M10	10	•
		12	•
		16	•
		20	•
		30	•
6	M12	40	•
		60	•
		12	•
		16	•
		20	•
		30	•
8	M16	40	•
		60	•
		16	•
		20	•
		25	•
10	M20	30	•
		40	•
		50	•
		60	•
12	M24	25	•
		40	•
		60	•

☒ 40035/d1-l



SCHEIBE – NICHTROSTEND

WASHER – STAINLESS STEEL



⊕ A2, ~DIN 125

h	d2	d1	€/1
0,5	7	3,2	•
0,8	9	4,3	•
1	10	5,3	•
1,6	12	6,4	•
	16	8,4	•

h	d2	d1	€/1
2	20	10,5	•
2,5	24	13	•
3	30	17	•
	37	21	•
4	44	25	•

☒ 40816/d1