




ZYLINDERSTIFT
DOWEL PIN

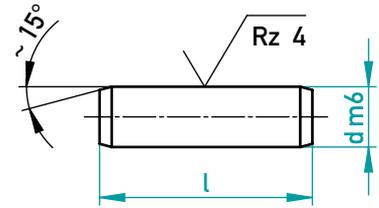


☐ Stahl / Steel, ehemals / former DIN 6325 / ~ISO 8734 - m6

d	1,5	2	2,5	3	4	5	6	8	10	12	16
4	•										
5	•	•									
6	•	•	•	•							
8	•	•	•	•	•	•					
10	•	•	•	•	•	•	•				
12	•	•	•	•	•	•	•	•			
14	•	•	•	•	•	•	•	•	•		
16	•	•	•	•	•	•	•	•	•	•	
18		•	•	•	•	•	•	•	•	•	
20		•	•	•	•	•	•	•	•	•	•
24			•	•	•	•	•	•	•	•	•
28				•	•	•	•	•	•	•	•
30				•	•	•	•	•	•	•	•
32				•	•	•	•	•	•	•	•
36				•	•	•	•	•	•	•	•
40				•	•	•	•	•	•	•	•
45				•	•	•	•	•	•	•	•
50				•	•	•	•	•	•	•	•
55					•	•	•	•	•	•	•
60					•	•	•	•	•	•	•
70					•		•	•	•	•	•
80							•	•	•	•	•
90								•	•	•	•
100								•	•	•	•
120									•	•	•

☐ 42511/d-I



ZYLINDERSTIFT MIT INNENGEWINDE
DOWEL PIN WITH INTERNAL THREAD

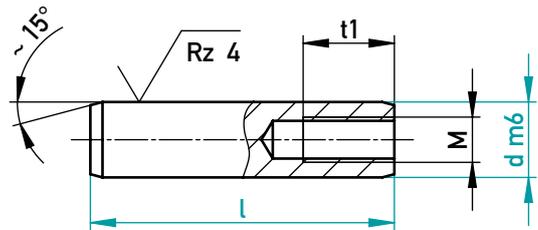

☐ Stahl / Steel, ehemals / former DIN 7979 / ~ISO 8735 - m6

d	5	6	8	10	12	14	16	20
t1	4,5	6	8	10	10	12	12	16
M	M3	M4	M5	M6	M6	M8	M8	M10
16	•	•	•					
20	•	•	•	•	•			
24	•	•	•	•	•			
28	•	•	•	•	•			
30	•	•	•	•	•			
32	•	•	•	•	•	•		
36	•	•	•	•	•	•	•	
40	•	•	•	•	•	•	•	•
45	•	•	•	•	•	•	•	•
50	•	•	•	•	•	•	•	•
60		•	•	•	•	•	•	•
70		•	•	•	•	•	•	•
80		•	•	•	•	•	•	•
90			•	•	•	•	•	•
100			•	•	•	•	•	•
120				•	•	•	•	•

☐ 44511/d-I