




FÜHRUNGSBOLZEN MIT BUND
GUIDE BOLT WITH COLLAR

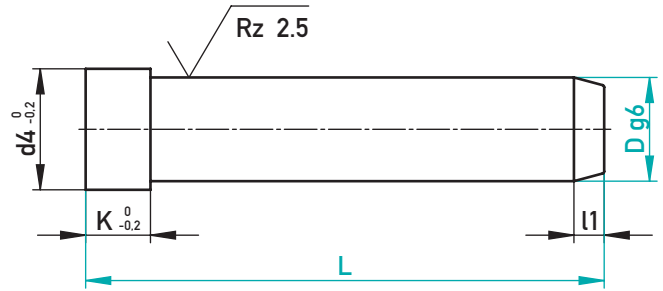

1.7131 / ~60 HRC

l1	K	d4	D	L	€/1
4	3	10	8	40	•
				50	•
				60	•
				80	•
				100	•
				120	•
4	3	12	9	40	•
				60	•
				80	•
				100	•
				120	•
4	3	12	10	40	•
				60	•
				80	•
				100	•
				120	•
				140	•
				160	•
7	6	16	12	40	•
				60	•
				80	•
				100	•
				120	•
				140	•
				160	•
				180	•
				200	•
7	8	18	14	60	•
				80	•
				100	•
				120	•
				140	•
				160	•
				180	•
				200	•
				220	•
				240	•
7	8	18	15	60	•
				80	•
				100	•
				120	•
				140	•
				160	•
				180	•
				200	•
				220	•
				240	•

l1	K	d4	D	L	€/1
7	8	20	16	40	•
				60	•
				80	•
				100	•
				120	•
				140	•
				160	•
				180	•
				200	•
				220	•
				240	•
				300	•
7	8	22	18	60	•
				80	•
				100	•
				120	•
				140	•
				160	•
				180	•
				200	•
				220	•
				240	•
				260	•
				280	•
				300	•
				320	•
7	8	24	20	60	•
				80	•
				100	•
				120	•
				140	•
				160	•
				180	•
				200	•
				220	•
				240	•
				260	•
				280	•
				300	•
				320	•



FÜHRUNGSBOLZEN MIT BUND

GUIDE BOLT WITH COLLAR

l1	K	d4	D	L	€/1
7	15	26	22	80	•
				100	•
				120	•
				140	•
				160	•
				180	•
				200	•
				220	•
				240	•
				260	•
				280	•
				300	•
				320	•
				340	•
7	15	28	24	80	•
				100	•
				120	•
				140	•
				160	•
				180	•
				200	•
				220	•
				240	•
				260	•
				280	•
				300	•
				320	•
				340	•
7	15	36	30	100	•
				120	•
				140	•
				160	•
				180	•
				200	•
				240	•
				300	•
				360	•
				400	•

l1	K	d4	D	L	€/1				
7	15	36	32	100	•				
				120	•				
				140	•				
				160	•				
				180	•				
				200	•				
				240	•				
				300	•				
				360	•				
				400	•				
				10	15	48	40	160	•
								200	•
								240	•
								300	•
360	•								
400	•								
15	15	58	50	160	•				
				200	•				
				240	•				
				300	•				
				360	•				
				400	•				
				500	•				
				20	20	68	60	280	•
								300	•
								340	•
								360	•
								400	•
								500	•

☒ 51001/DxL