




**FÜHRUNGSBOLZEN MIT BUND, MIT PASSSITZ, MIT SCHMIERNUTEN**  
 GUIDE BOLT WITH COLLAR, WITH FITTING DIAMETER, WITH OIL GROOVES

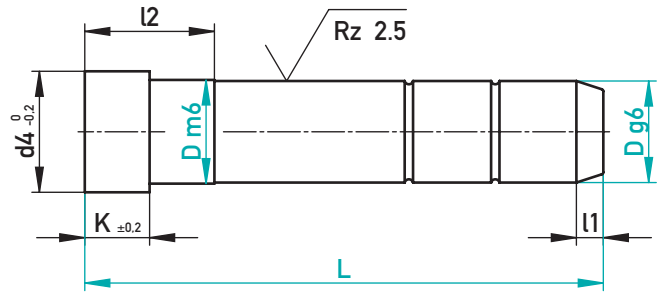

1.7131 / ~60 HRC

l1	K	d4	l2	D	L	€/1
4	3	12	17	10	40	•
					60	•
			22		80	•
			27		100	•
7	6	16	17	12	60	•
			22		80	•
			27		100	•
			36		120	•
7	8	18	17	14	60	•
			22		80	•
			27		100	•
			36		120	•
			46		140	•
					160	•
					180	•
7	8	20	22	16	60	•
			27		80	•
					100	•
			36		120	•
			46		140	•
					160	•
					180	•
					200	•
					240	•
7	8	22	27	18	80	•
					100	•
			36		120	•
			46		140	•
					160	•
			56		180	•
					200	•
					240	•
					280	•
7	8	24	27	20	80	•
					100	•
			36		120	•
			46		140	•
					160	•
			56		180	•
					200	•
					240	•
					280	•

l1	K	d4	l2	D	L	€/1
7	15	26	36	22	100	•
			46		120	•
					140	•
			56		160	•
					180	•
			76		200	•
					220	•
					240	•
					280	•
					300	•
					320	•
					360	•
7	15	28	36	24	100	•
			46		120	•
					140	•
			56		160	•
					180	•
			76		200	•
					220	•
					240	•
					280	•
					300	•
					320	•
					360	•
7	15	36	56	30	160	•
					200	•
			76		240	•
					280	•
					300	•
					360	•
7	15	36	56	32	160	•
					200	•
			76		240	•
					280	•
					300	•
					360	•
10	15	48	56	40	200	•
			76		240	•
			96		300	•
					360	•
					400	•
					500	•
15	15	58	56	50	200	•
			76		240	•
			96		300	•
					360	•
					400	•
					500	•
20	20	68	96	60	240	•
			116		300	•
					360	•
					400	•
					500	•

51911/DxL