




FÜHRUNGSBOLZEN MIT BUND, MIT PASSSITZ, MIT SCHMIERNUTEN
 GUIDE PILLAR WITH COLLAR, WITH FITTING DIAMETER, WITH OIL GROOVES

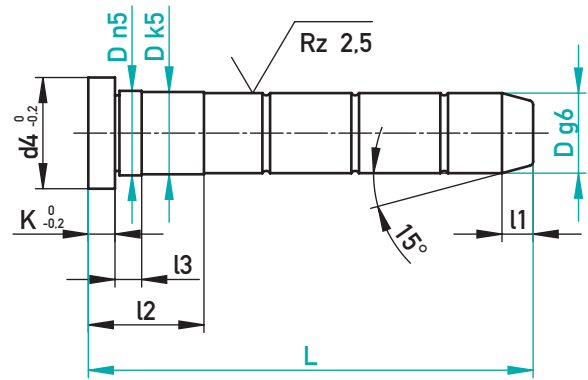

1.7131 / ~60 HRC

l1	K	d4	l3	l2	D	L	€/1
4	3	12	6	17	9	40	•
						60	•
				22		80	•
			10	27		100	•
4	3	12	6	17	10	40	•
						60	•
				22		80	•
			10	27		100	•
5	6	15	6	22	12	60	•
						80	•
						100	•
						120	•
			10	27		140	•
						160	•
5	6	17	6	22	14	60	•
						80	•
						100	•
						120	•
			10	27		140	•
						160	•
5	6	18	6	22	15	60	•
						80	•
						100	•
						120	•
			10	27		140	•
						160	•
5	6	19	6	22	16	80	•
						100	•
						120	•
			10	27		140	•
						160	•
7	6	21	6	22	18	80	•
						100	•
						120	•
			10	27		140	•
						160	•
						180	•
				36		200	•
						220	•
7	6	23	6	22	20	80	•
						100	•
						120	•

l1	K	d4	l3	l2	D	L	€/1
7	6	23	10	27	20	140	•
						160	•
						180	•
				36		200	•
						220	•
7	6	25	10	27	22	100	•
						120	•
						140	•
						160	•
						180	•
				36		200	•
						220	•
						250	•
				46		280	•
7	6	27	10	27	24	100	•
						120	•
						140	•
						160	•
						180	•
				36		200	•
						220	•
						250	•
				46		280	•
7	6	35	10	36	30	120	•
						140	•
						160	•
						180	•
						200	•
						220	•
						250	•
				46		280	•
						320	•
7	6	37	10	36	32	120	•
						140	•
						160	•
						180	•
						200	•
						220	•
						250	•
				46		280	•
						320	•
						360	•

51920/DxL



FÜHRUNGSBOLZEN MIT BUND, MIT PASSSITZ, MIT SCHMIERNUTEN

GUIDE PILLAR WITH COLLAR, WITH FITTING DIAMETER, WITH OIL GROOVES

l1	K	d4	l3	l2	D	L	€/1
10	10	45	15	46	40	160	•
						180	•
						200	•
						220	•
						250	•
						280	•
				56		320	•
						360	•
				66		400	•
						450	•
10	10	47	15	46	42	160	•
						180	•
						200	•
						220	•
						250	•
						280	•
				56		320	•
						360	•
				66		400	•
						450	•

l1	K	d4	l3	l2	D	L	€/1
10	10	55	15	56	50	200	•
						250	•
						280	•
						320	•
				66		360	•
				76		400	•
						450	•
10	10	57	15	56	52	200	•
						250	•
						280	•
				66		360	•
				76		450	•
						500	•

☒ 51920/DxL

