




FÜHRUNGSBOLZEN MIT BUND, MIT PASSSITZ
GUIDE BOLT WITH COLLAR, WITH FITTING DIAMETER

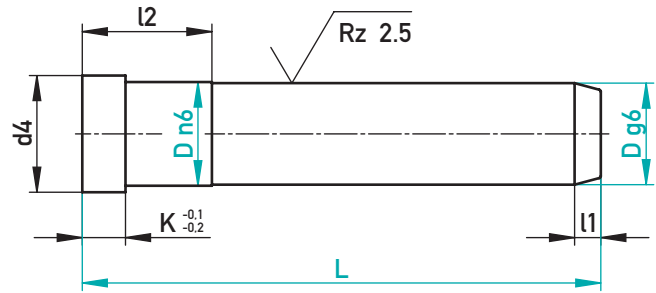

1.7131 / ~60 HRC

l1	K	d4	l2	D	L	€/1
4	3	11	11	9	40	•
					60	•
					70	•
					80	•
					90	•
					100	•
					120	•
4	3	12	11	10	40	•
					50	•
					60	•
					70	•
					80	•
					90	•
					100	•
					120	•
5	6	15	16	12	60	•
					70	•
					80	•
					90	•
					100	•
					110	•
					120	•
					140	•
					160	•
					180	•
					200	•
5	8	17	21	14	60	•
					70	•
					80	•
					90	•
					100	•
					110	•
					120	•
					140	•
					160	•
					180	•
					200	•

l1	K	d4	l2	D	L	€/1
5	8	19	21	16	60	•
					70	•
					80	•
					90	•
					100	•
					110	•
					120	•
					140	•
					160	•
					180	•
					200	•
					220	•
					240	•
					260	•
7	8	21	21	18	60	•
					70	•
					80	•
					90	•
					100	•
					110	•
					120	•
					140	•
					160	•
					180	•
					200	•
					220	•
					240	•
					260	•
					280	•
7	8	23	21	20	80	•
					90	•
					100	•
					110	•
					120	•
					140	•
					160	•
					180	•
					200	•
					220	•
					240	•
					260	•
					280	•
					300	•
					320	•



FÜHRUNGSBOLZEN MIT BUND, MIT PASSSITZ

GUIDE BOLT WITH COLLAR, WITH FITTING DIAMETER

l1	K	d4	l2	D	L	€/1
7	10	25	26	22	80	•
					100	•
					120	•
					140	•
					160	•
					180	•
					200	•
					220	•
					240	•
					280	•
7	10	27	26	24	80	•
					100	•
					120	•
					140	•
					160	•
					180	•
					200	•
					220	•
					240	•
					260	•
7	10	35	35	30	100	•
					120	•
					140	•
					160	•
					180	•
					200	•
					220	•
					240	•
					260	•
					280	•
					300	•
					320	•
					360	•
					400	•

l1	K	d4	l2	D	L	€/1
7	10	35	36	32	100	•
					120	•
					140	•
					160	•
					180	•
					200	•
					220	•
					240	•
					280	•
					320	•
7	10	45	35	40	140	•
					160	•
					180	•
					200	•
					250	•
					280	•
					320	•
					360	•
					400	•

☒ 51930/D-L

