




KUPPLUNG MIT INNENGEWINDE

COUPLER WITH INTERNAL THREAD

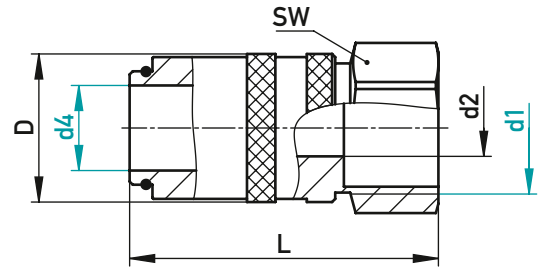

Öl/Oil 200°C, Wasser/Water 150°C, Luft/Air 200°C
 15 bar
 2.0401

bar	SW	L	D	d2	d4	d1	← 70804	↗ 70803
15	17	41,5	18	6	9	M10x1	•	•
						M14x1,5	•	•
						G1/4"	•	•
		44,5	23,5	9	13	G1/4"	•	•
	22	46				G3/8"	•	•
	24	49				G1/2"	•	•

70804/d4-d1 • 70803/d4-d1