



PRÜF- UND EINSTELLSTATION

TEST AND ADJUSTING STATION



- ✓ Akku und Transportbox im Lieferumfang enthalten
Battery and transport box included in delivery scope

€/1

✉ 817686/P2

TECHNISCHE INFORMATIONEN

- ▶ Prüfung verschiedener Sensortypen (mechanisch, induktiv, kapazitiv, photoelektrisch und Ultraschall)
- ▶ 24 V-DC 100 mA
- ▶ Anschlussmöglichkeit für PNP- und NPN-Geräte (Öffner und Schließer)
- ▶ Anzeige per LED und Summer
- ▶ Eingebaute Stahl-Messplatte zur Prüfung von induktiven Sensoren
- ▶ Automatisches Abschalten nach ca. 120 Sekunden
- ▶ Laden mit universellem Mikro-USB-Ladegerät möglich
- ▶ Akku LiPo 9V 600 mAh
- ▶ LED für Akku-Statusanzeige

PRÜFBEISPIELE · TESTING EXAMPLES

- ▶ **817664-P**
807609, 807610, 817614, 807660, 807662, 807685, 807600-5, 808600-5
- ▶ **817664-P + 817602-P**
807600, 808600, 807600-2, 808600-2, 807600-4, 808600-4, 807630, 807635, 808635, 817616, 817617, 817625
- ▶ **817654-P**
807632, 807650, 808650, 817676, 817677
- ▶ **817664-P + 817702-P**
807700, 808700, 807700-2, 808700-2
- ▶ **817656-P**
807615, 807615-M, 807620, 807622


TECHNICAL INFORMATION

- ▶ Check of various sensor types (mechanical, inductive, capacitive, photoelectric and ultrasonic)
- ▶ 24 V-DC 100 mA
- ▶ Suitable for PNP and NPN devices (NO and NC versions)
- ▶ Indication via LED and acoustic (buzzer)
- ▶ Built-in steel target for checking inductive sensors
- ▶ Automatic switch off after 120 seconds of non-use
- ▶ Charging with universal Micro-USB-Charger possible
- ▶ Battery LiPo 9V 600 mAh
- ▶ LED battery-state indication



ADAPTER-EINSATZ (1 STÜCK)

ADAPTER INSERT (1 PIECE)

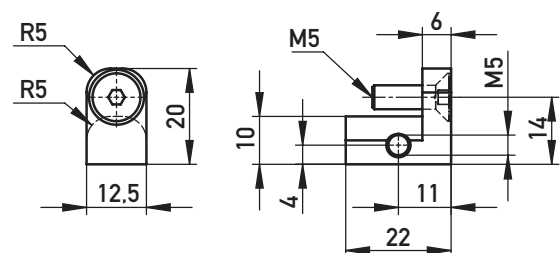

AI

€/1

✉ 817605